

ATH-Four Lift 55HAP




- Electro-hydraulic 4-post lift with quick lift unit and load-dependent lowering function
- Central operating unit, including unit cover
- Level running rail with integrated wheel-free jack (load capacity 3.5t) and wheel alignment kit
- Precisely levelable notch and rail system
- Safety Control: Electropneumatic safety locks that automatically unlock with lifting and lowering
- Safety Lock: ability to lock the load on to the safety mechanism
- Multifunctional mounting via continuously adjustable rails
- Perfect platform protection made of special polymer and double powder coating

Technical details

Rated load capacity	5,5t
Lifting height max.	2.045mm
Drive-on-height	275mm
Total platform length	5.600mm
Total platform width	650mm
Motor power	4kW
Lifting/Lowering time	approx. 45s
Power supply voltage	3x 400V / C16A
Concrete strength	min. C20/25 7.400x3.900x 200mm



Wheel-free jack (load capacity 3.5 t) **with** wheel alignment kit

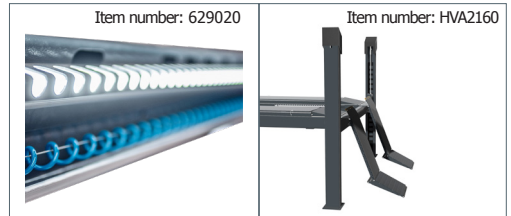

Optional
24V LED lighting


Optional extensions for
Drive-on ramps (640mm)



Accessories



User manual



Spare parts



**Augmented
Reality / 3D**



Service

PDF Product flyer

Item number

ATH-Four Lift 55HAP

650022



ATH-Four Lift 55HAP

Item number: 650022



ATH-Lifting

